



Smart Display Module- Programming Guide

Introduction

The objective of this post is to explain how to upload an Arduino program to the ESP32 module,

The ESP32 WiFi and Bluetooth chip is the latest generation of Espressif products. It has a dual-core 32-bit MCU, which integrates WiFi HT40 and Bluetooth/BLE 4.2 technology inside.

ESP32-S3-wroom-1 has a significant performance improvement. It is equipped with a high-performance dual-core Tensilica LX7 MCU. One core handles high speed connection and the other for standalone application development. The dual-core MCU has a 240 MHz frequency and a computing power of 600 DMIPS.

In addition, it supports Wi-Fi HT40, Classic Bluetooth/BLE 4.2, and more GPIO resources.

Installing using Arduino IDE

Programming the ESP32

An easy way to get started is by using the familiar Arduino IDE. While this is not necessarily the best environment for working with the ESP32, it has the advantage of being a familiar application, so the learning curve is flattened.

We will be using the Arduino IDE for our experiments.

1, Installing using Arduino IDE

we first need to install version 1.8.19 of the Arduino IDE (or greater),for example, the Arduino installation was in "C:/Programs(x86)/Arduino".

download release link:


<https://downloads.arduino.cc/arduino-1.8.19-windows.exe>

2, This is the way to install Arduino-ESP32 directly from the Arduino IDE.


Add Boards Manager Entry

Here is what you need to do to install the ESP32 boards into the Arduino IDE:

- (1) Open the Arduino IDE.

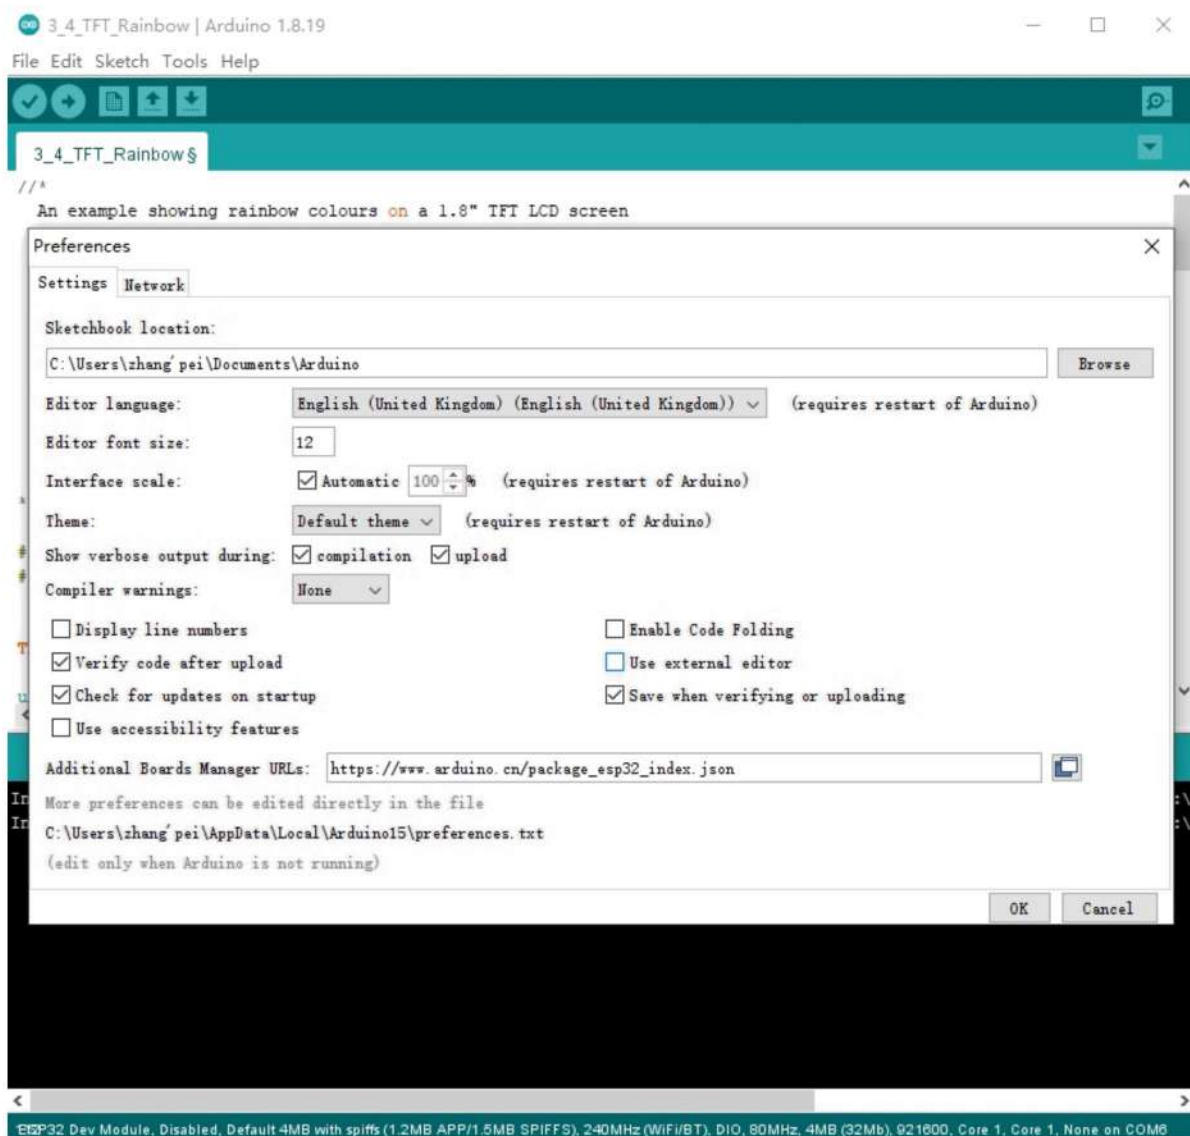


- (9) In the Arduino IDE click on the Tools menu on the top menu bar.
- (10) Scroll down to the Board: entry
- (11) A submenu will open when you highlight the Board: entry.
- (12) At the top of the submenu is Boards Manager. Click on it to open the Boards Manager dialog box.
- (13) In the search box in the Boards Manager enter "esp32".

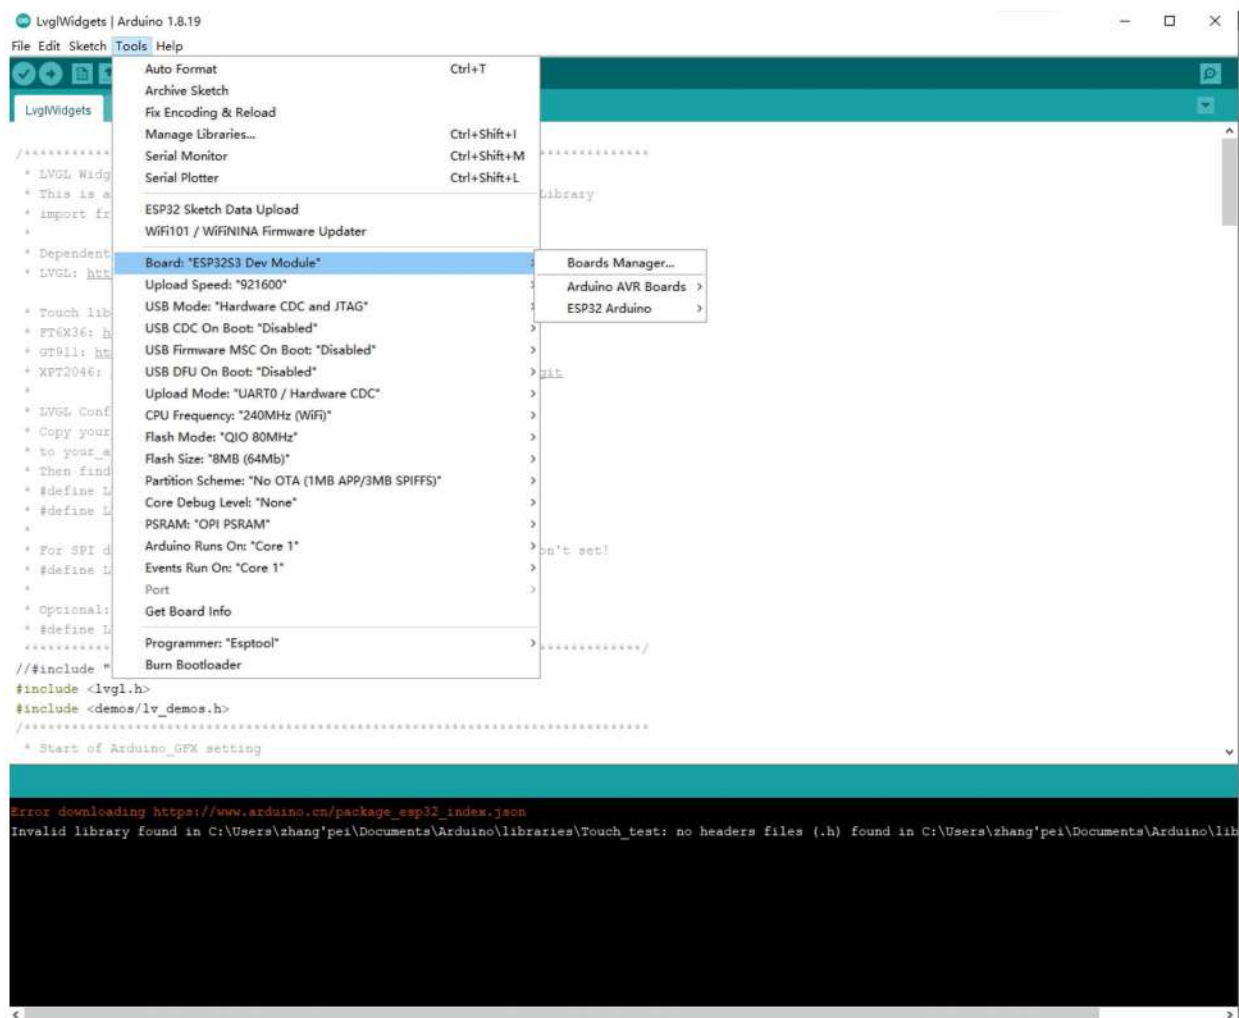



(14) You should see an entry for “esp32 by Espressif Systems”. Highlight this entry and click on the Install button.

This will install the ESP32 boards into your Arduino IDE

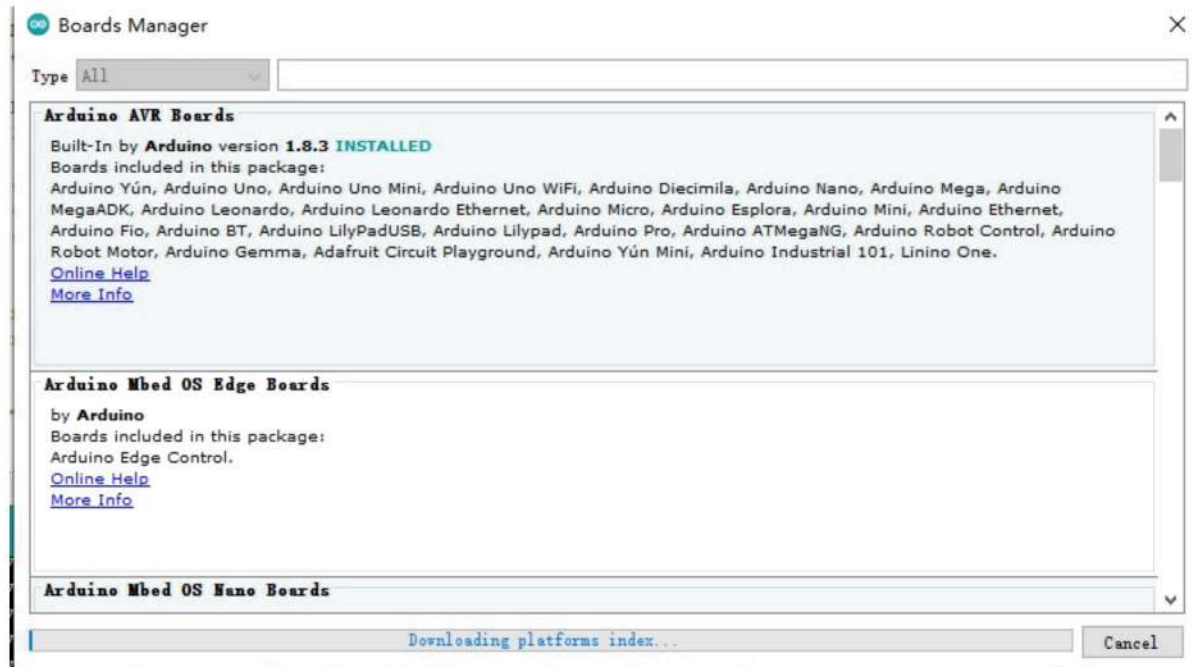


Once the installation completes, we need to select the correct board options for the "ESP32 Arduino" board. In the board type, in the tools tab, we choose "ESP32S3 Dev Module".

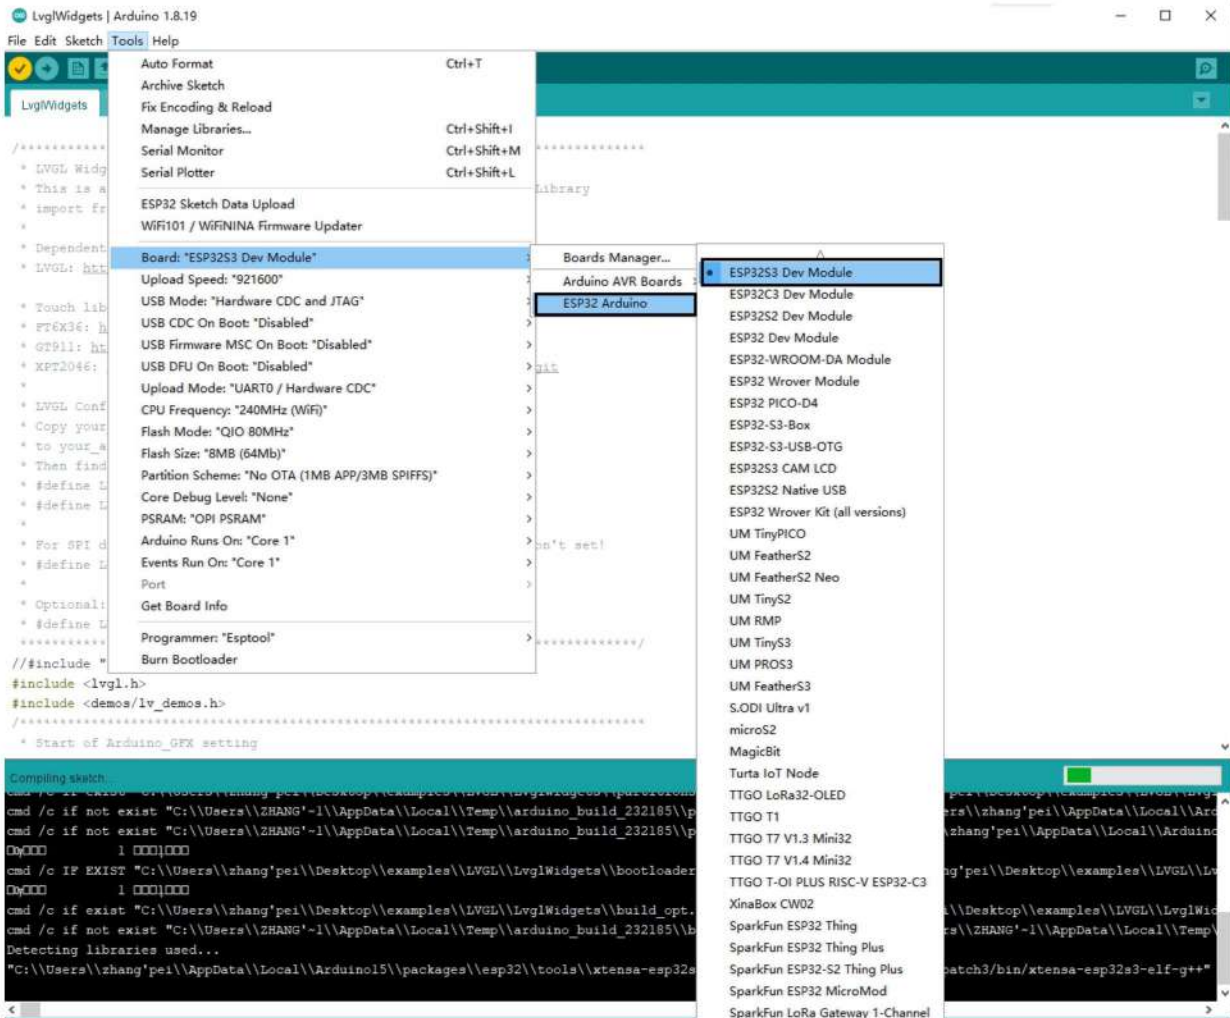

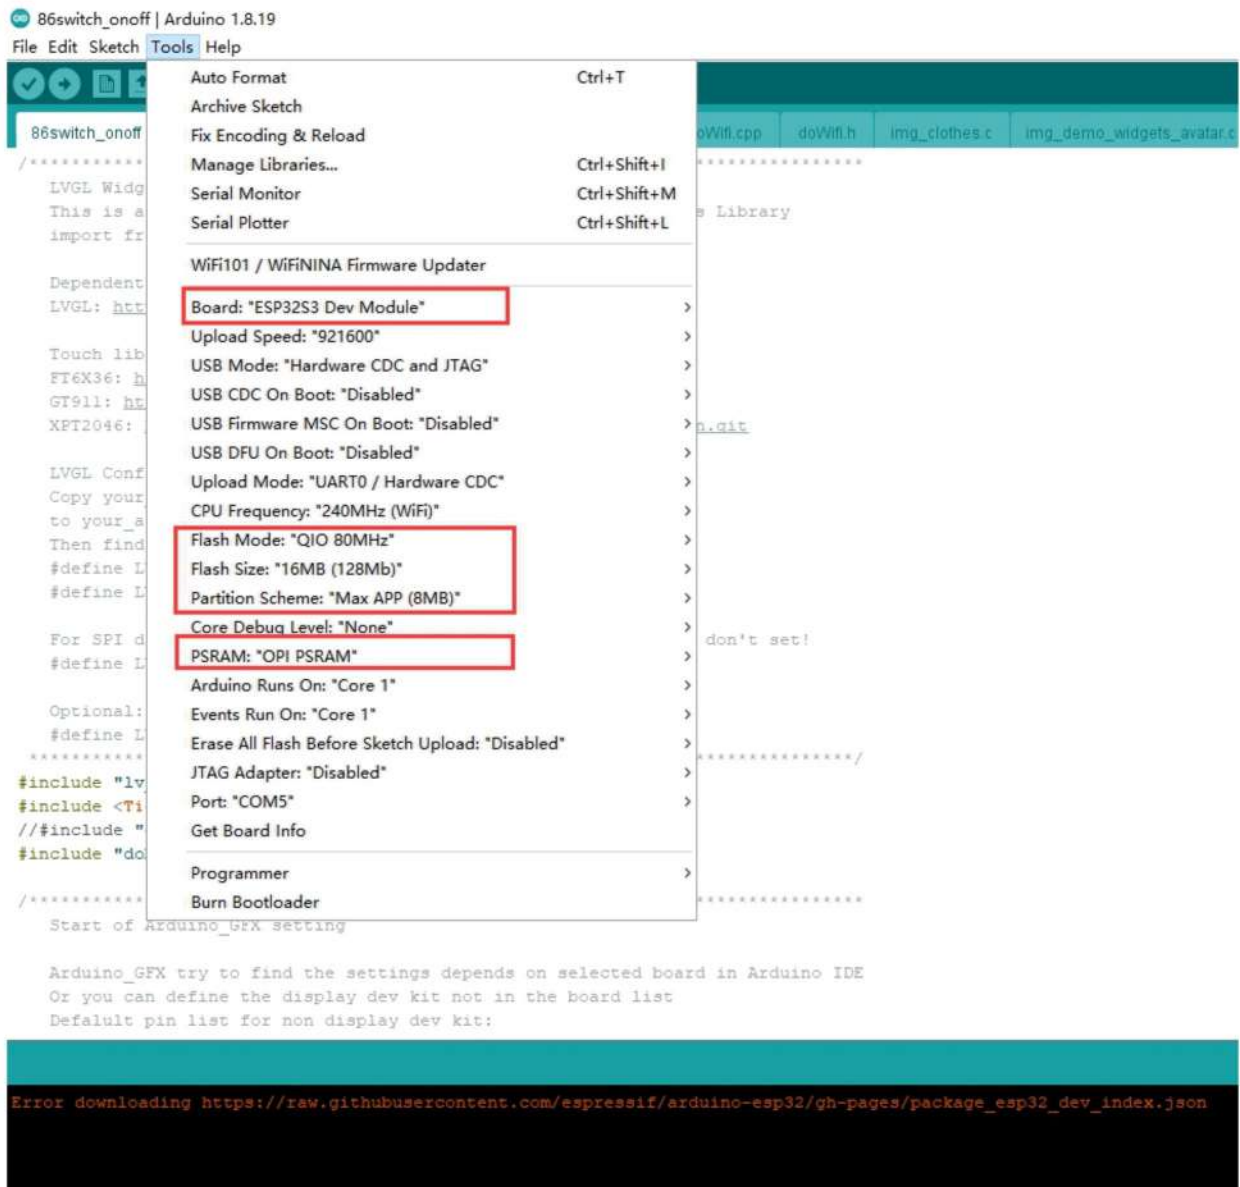

Set and In the programmer entry of the same tab, we choose "esptool".

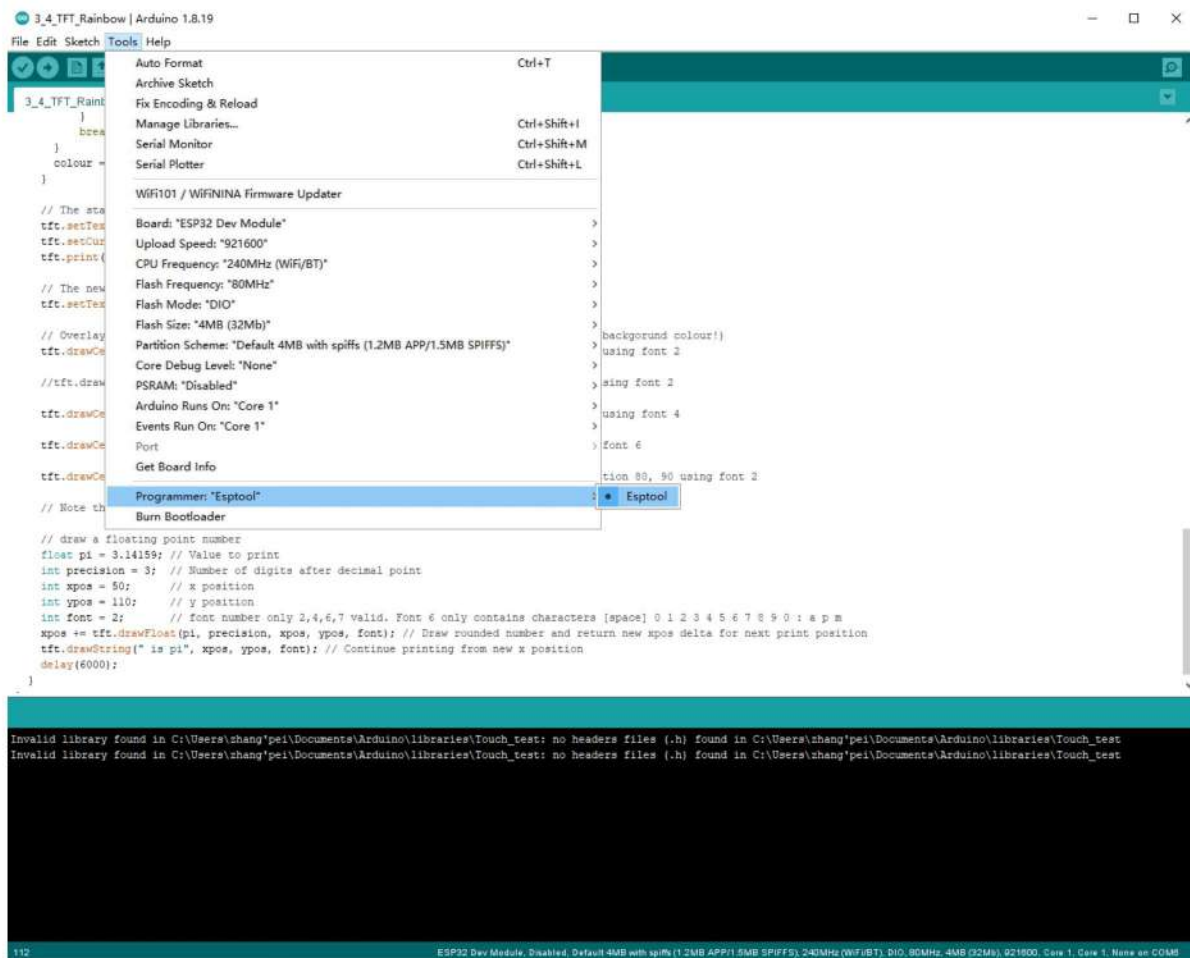

It's important to note that after the code is uploaded, the device will start to run it. So, if we want to upload a new program, we need to reset the power of the device, in order to guarantee that it enters flashing mode again.


First program

Since this platform is based on Arduino, we can use many of the usual functions. As an example for the first program, the code below starts the Serial port and prints "hello from ESP32" every second.

```
void setup() {
  Serial.begin(115200);
}

void loop() {
  Serial.println("hello from ESP32");
  delay(1000);
}
```


If everything is working fine, we will see the output in the serial console shown.

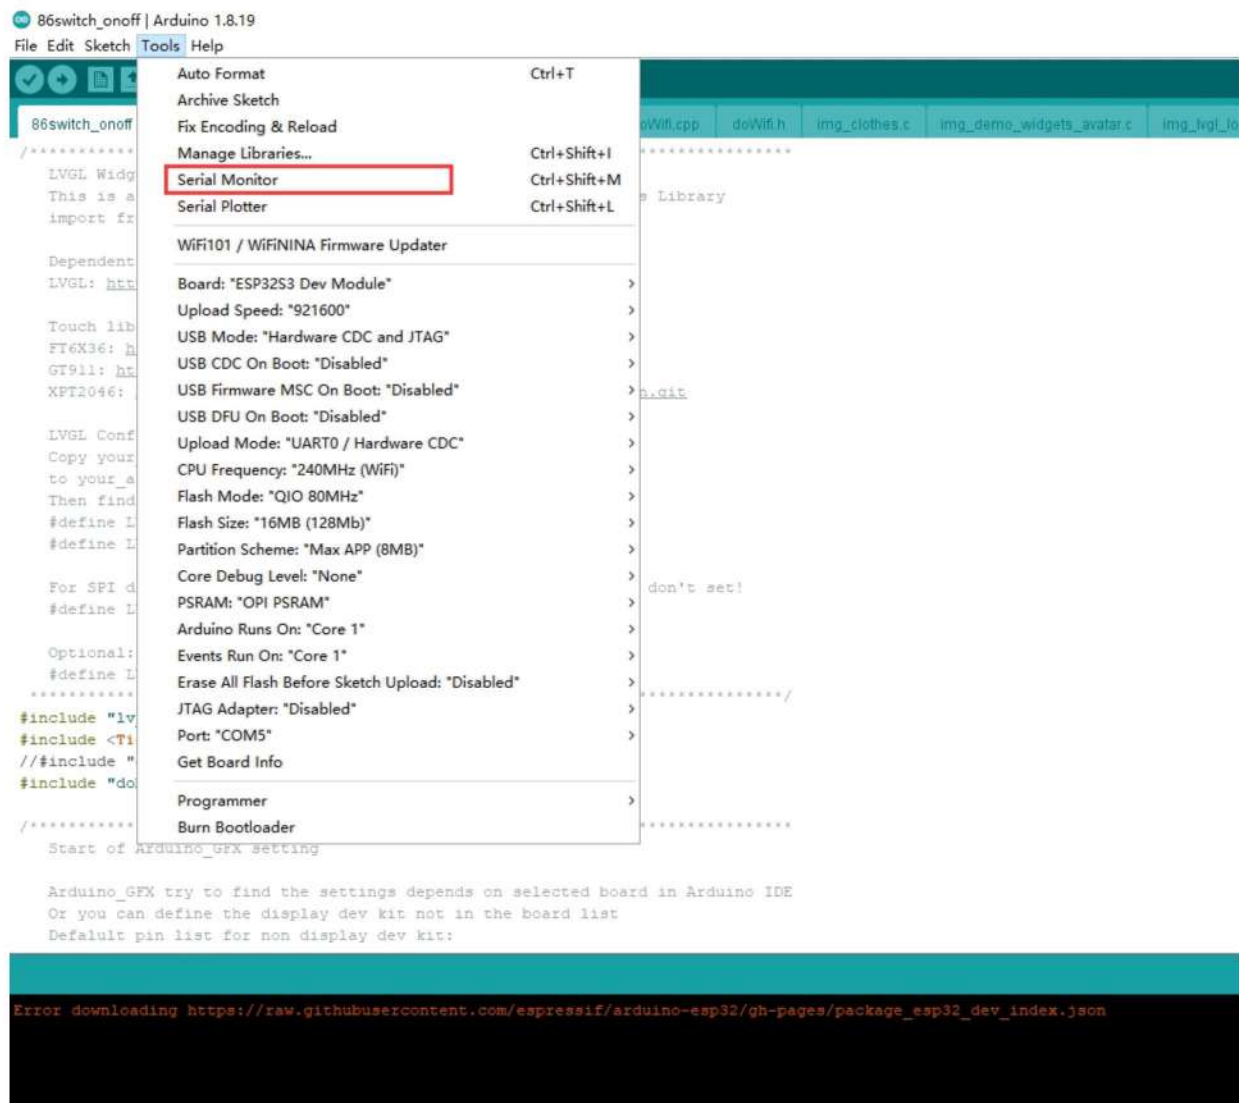

Again thank you for so much concern.. Hopefully, it's the beginning of a wonderful relationship!

Sample program usage


At present, only a preliminary explanation and introductory use are given to the samples displayed on the screen, and the corresponding examples in the data center are found, as shown in the figure:

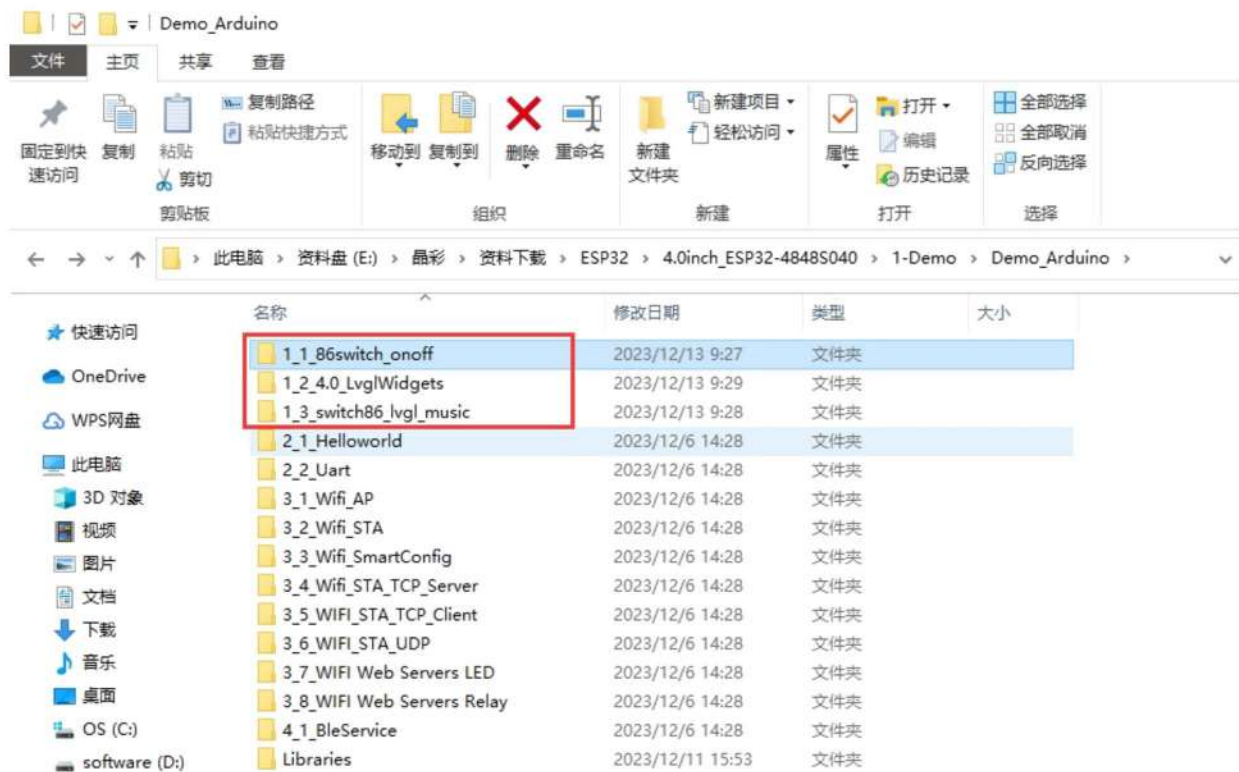


The examples in the red circle are all based on the Arduino_GFX library as the basic application. This library supports various commonly used driver chips, such as ST7735, ST7789, ILI9341, etc., and has good compatibility.

Arduino_GFX library file installation:

Open the library manager in Arduino, search for Arduino_GFX, and click instal .

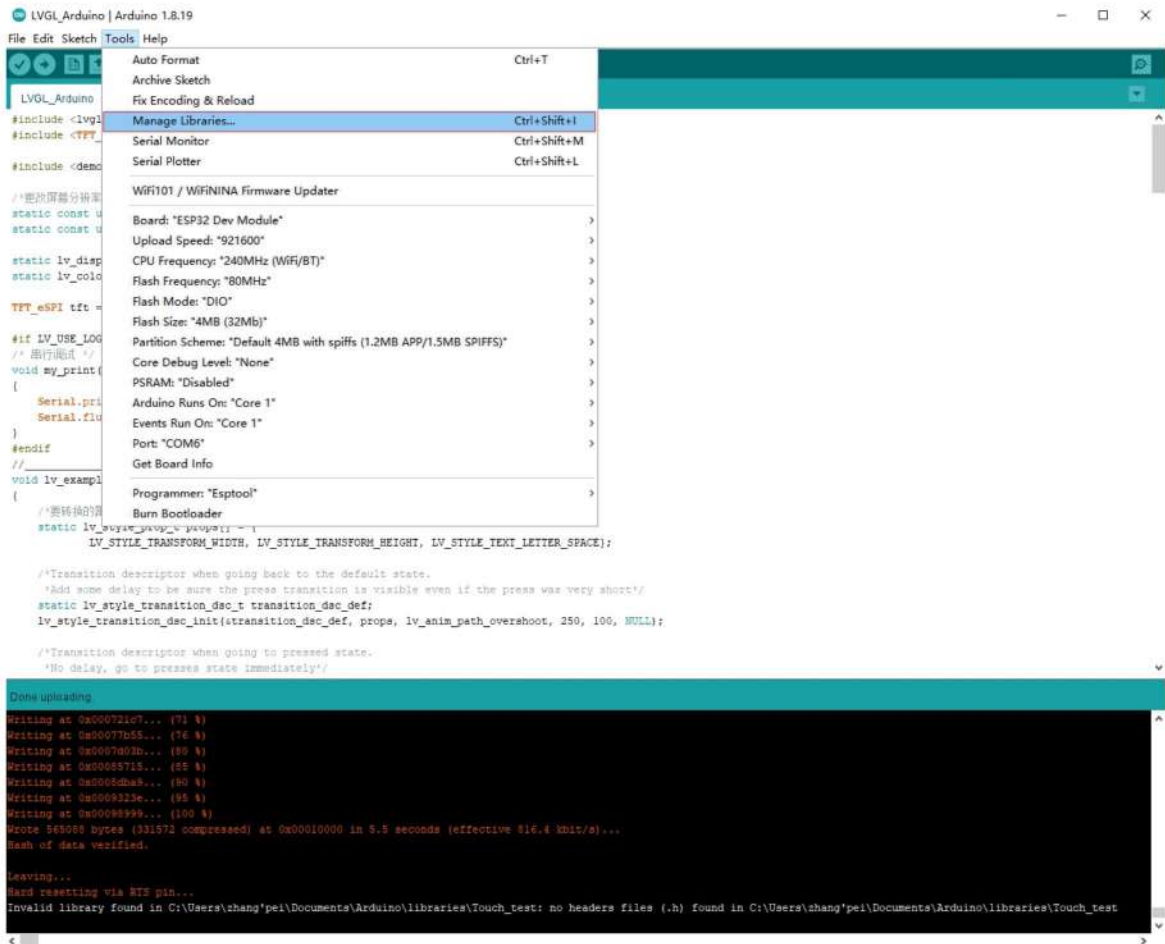

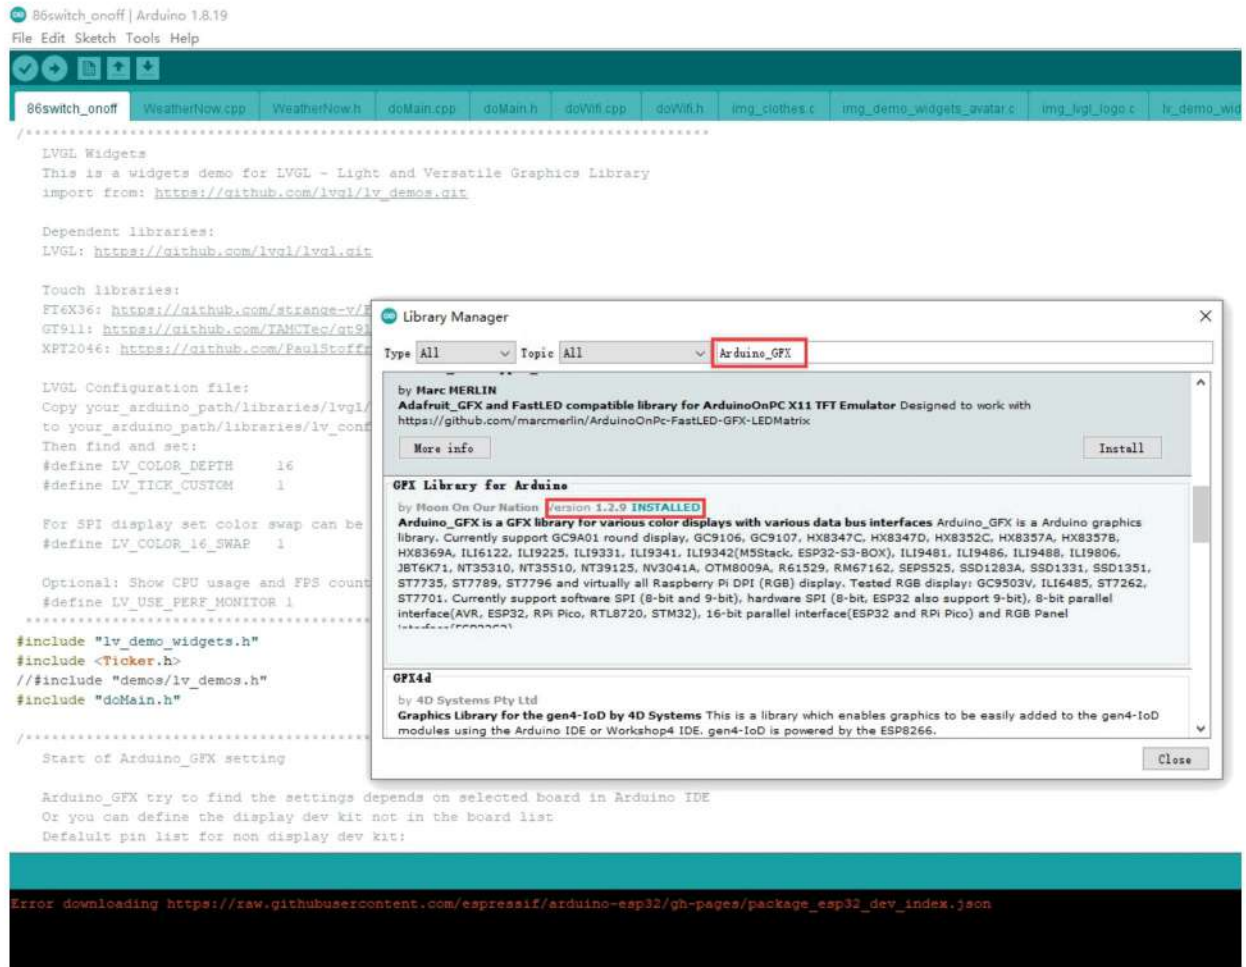


Although the Arduino_GFX library has many advantages, it may also have a troublesome place for ordinary users, that is, after the installation

About the use of touch and LVGL:


Find the data center 1_2_4.0_LvglWidgets

As shown:

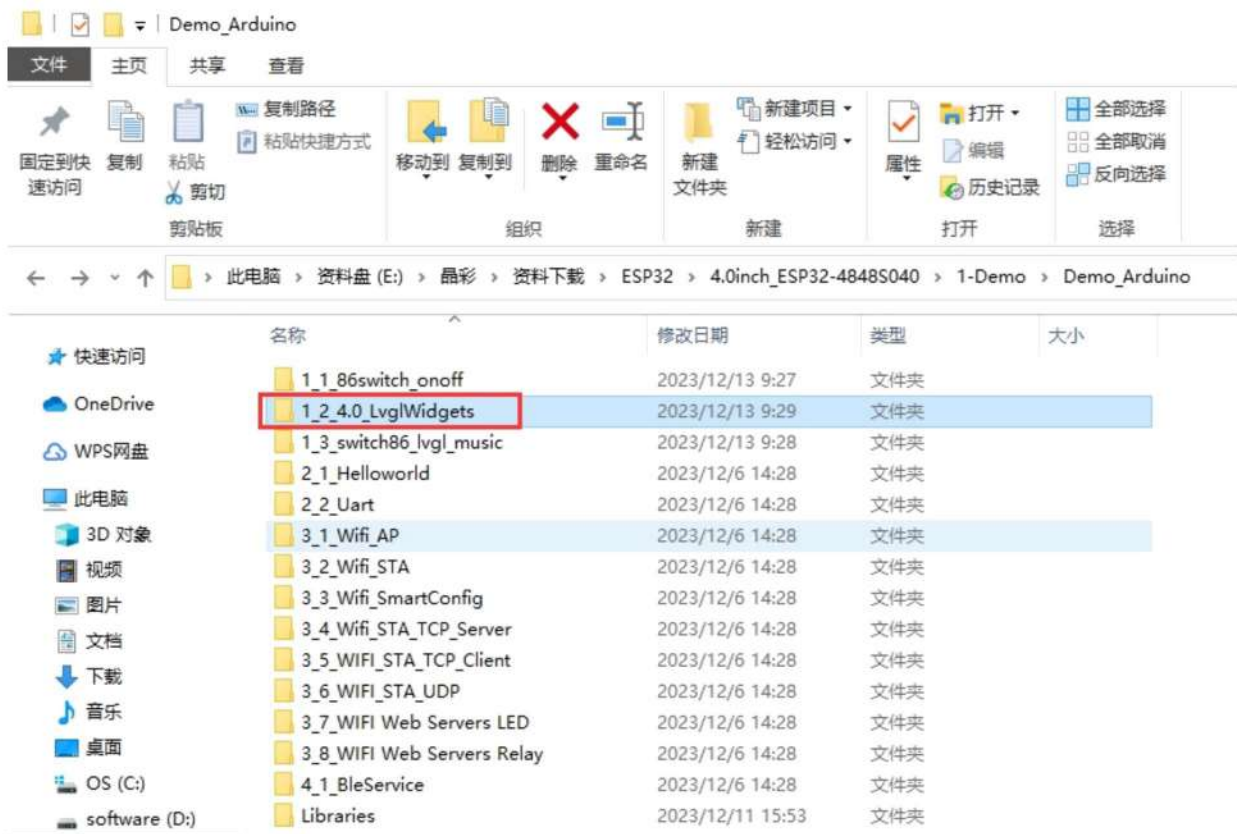


Download two library files .

One -Arduino_GFX library

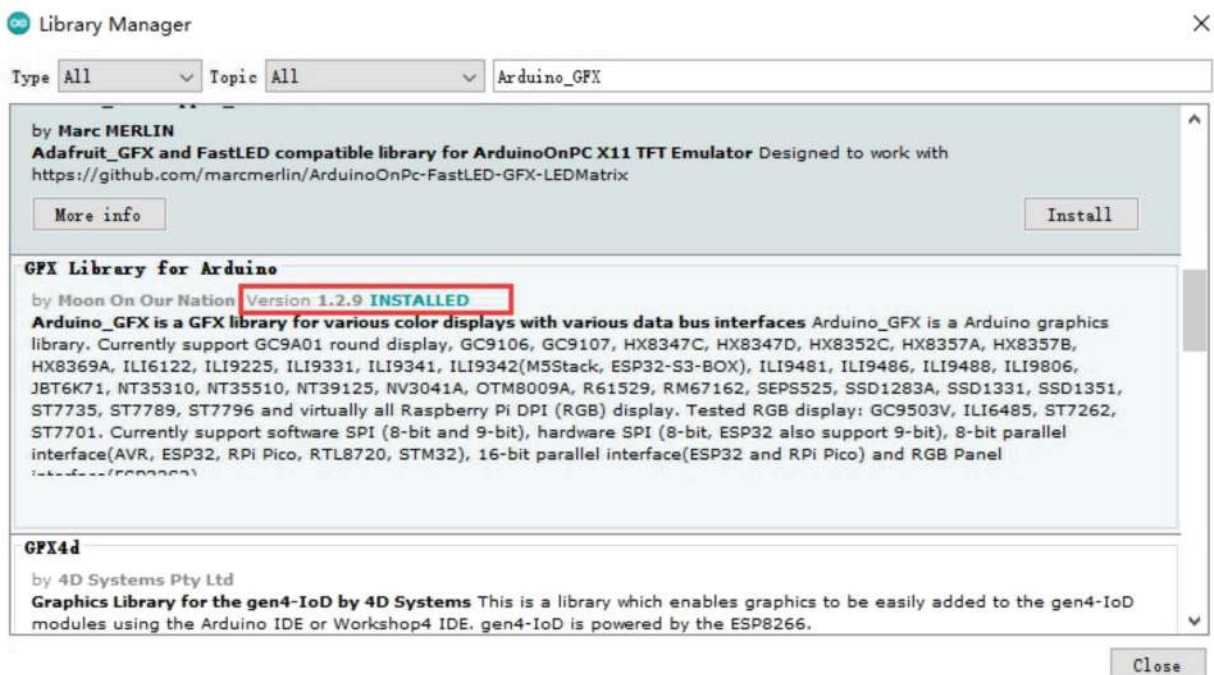

Two -Lvgl

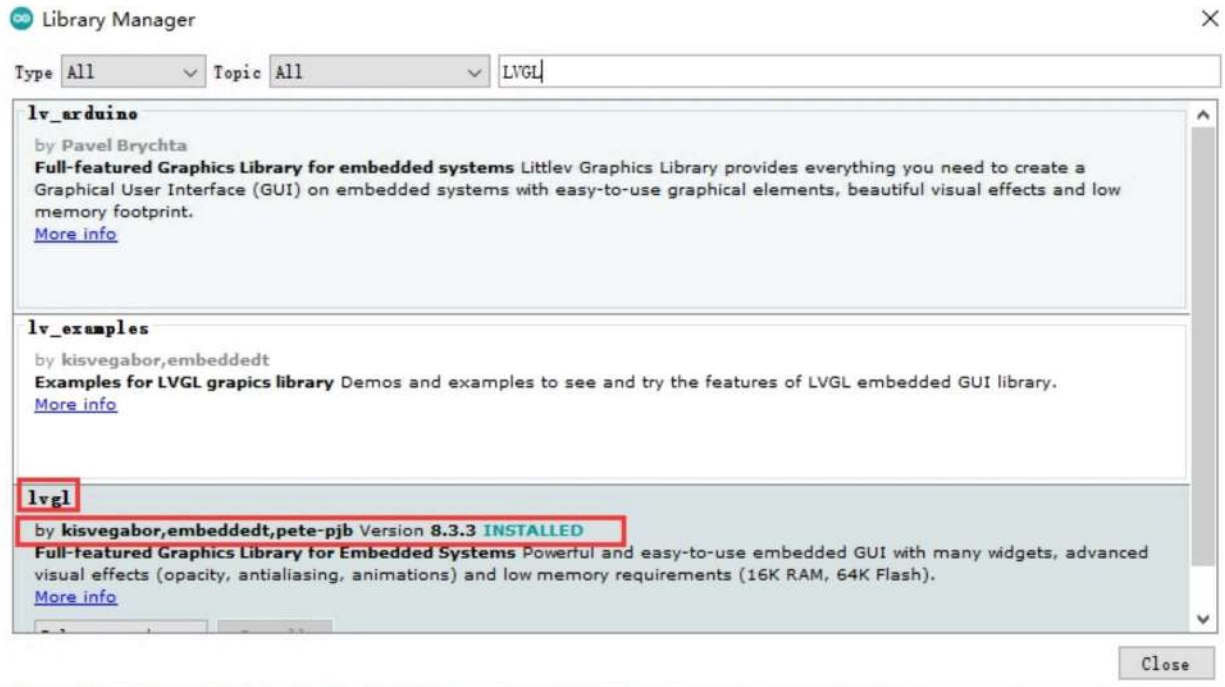

Copy the lv_conf.h of the data center .

As shown:



Put this file under the arduino library file, it must be in the same root directory as the library TFT_eSPI .

As shown:

←

→

⌵

⬆

此电脑 > OS (C:) > 用户 > zhang'pei > 文档 > Arduino > libraries

在 libraries 中搜索

快速访问

OneDrive

WPS网盘

此电脑

3D 对象

视频

图片

文档

下载

音乐

桌面

OS (C:)

software (D:)

资料盘 (E:)

共享文件(192.168.1.1)

网络

名称	修改日期	类型	大小
Adafruit_I2C_Sensor	2022/6/27 12:06	文件夹	
Adafruit_Unified_Sensor	2022/6/27 12:06	文件夹	
ArduinoJson	2022/7/6 9:23	文件夹	
AsyncTCP	2022/6/27 12:06	文件夹	
Audio	2022/6/28 17:44	文件夹	
DallasTemperature	2022/6/27 12:06	文件夹	
DHT_sensor_library	2022/6/27 12:06	文件夹	
DHT_sensor_library_for_ESPx	2022/6/25 10:23	文件夹	
ESP32Servo	2022/6/27 12:06	文件夹	
ESPAsyncWebServer	2022/6/27 12:06	文件夹	
FastLED	2022/7/6 9:23	文件夹	
GFX_Library_for_Arduino	2022/8/9 18:08	文件夹	
gt911-arduino-main	2022/8/17 10:21	文件夹	
GT911-master	2022/8/15 15:10	文件夹	
I2Remote	2022/6/27 12:06	文件夹	
JPEGDecoder	2022/6/28 13:49	文件夹	
LiquidCrystal_I2C	2022/6/27 12:06	文件夹	
LovyanGFX	2022/7/31 14:05	文件夹	
lvgl	2022/3/4 10:31	文件夹	
MFRC522	2022/6/27 12:06	文件夹	
OneWire	2022/6/27 12:06	文件夹	
PNGdec	2022/6/28 10:48	文件夹	
Rtc_by_Makuna	2022/6/27 12:06	文件夹	
TFT_eSPI	2022/8/16 12:46	文件夹	
TFT_Touch-master	2022/8/1 12:16	文件夹	
Time	2022/7/6 9:23	文件夹	
TJpg_Decoder	2022/8/3 14:25	文件夹	
Touch_test	2022/8/1 12:12	文件夹	
TP_Arduino_DigitalRain_Anim-main	2022/7/31 13:13	文件夹	
XPT2046_Touchscreen	2022/7/17 18:09	文件夹	
XT_DAC_Audio	2022/7/2 17:12	文件夹	
lv_arduino.rar	2022/7/21 14:20	360压缩 RAR 文件	6,740 KB
lv_conf.h	2022/8/19 17:01	C Header 源文件	24 KB
readme.txt	2022/6/15 15:12	文本文档	1 KB

After compiling, you can run LVGL and touch normally.